Solenoid cartridge valves

screw-in, 2-way, poppet type, leak free

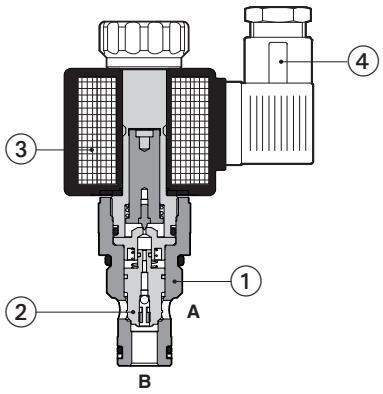

① cartridge body
② poppet
③ coil
④ coil connector (to be ordered separately)

JO-DL-4-2-X 24DC

JO-DL

Leak free, poppet type solenoid cartridges in screw-in execution normally used to cut off the hydraulic power supply line. They are available in normally closed NC, or normally open NO configurations.

Max flow: **300 l/min**
Max pressure: **350 bar**

1 MODEL CODE

JO	-	D	L	-	4	-	2	/	NC	-	X	24 DC	**	/	*

Cartridge valve screw-in type UNF

D = Directional control

L = Poppet type

Size:
4 = 3/4”-16UNF-2A
6 = 7/8”-14UNF-2A
10 = 1 5/16”-12UNF-2A

2 = Two-way

Version:
NC = normally closed in rest position
NO = normally open in rest position

X = Without connector, see section 5 for available connector

Voltage code:
12DC = 12 VDC
24DC = 24 VDC

Series number

Seals material, see section 4:
- = NBR
PE = FKM
BT = HNBR

2 HYDRAULIC SYMBOL

Hydraulic symbols

/NO



/NC



3 GENERAL CHARACTERISTICS

Installation position	Any position
Cavity	JO-DL-4 = SAE-08-2N; JO-DL-6 = SAE-10-2N; JO-DL-10 = SAE-16-2N
MTTFd values according to EN ISO 13849	150 years, for further details see technical table P007
Ambient temperature	**Standard** execution = -30°C ÷ +80°C **/PE** option = -20°C ÷ +80°C **/BT** option = -40°C ÷ +70°C
Compliance	CE to Low Voltage Directive 2014/35/EU RoHS Directive 2011/65/EU as last update by 2015/65/EU REACH Regulation (EC) n°1907/2006

4 HYDRAULIC CHARACTERISTICS

Model		**JO-DL-4-2/NC**	**JO-DL-4-2/NO**	**JO-DL-6-2/NC**	**JO-DL-6-2/NO**	**JO-DL-10-2/NC**	**JO-DL-10-2/NO**
Operating pressure	[bar]	Ports A and B **350**					
Max flow	[l/min]	40		75		300	
Response time: energizing	[ms]	35	50	30	50	35	150
de-energizing	[ms]	50	35	60	35	70	35
Internal leakage		less than 5 drops/min (≤ 0,36 cm^3/min) max at 350 bar					

5 ELECTRIC CHARACTERISTICS

Relative duty factor	100%	
Supply voltage	See model code at section 1	
Supply voltage tolerance	±10%	
Max power	20 Watt	
Power connector	666 (plastic - black); 3 pins, cable clamp PG11, cable max ø 11 mm	**to be ordered separately**
Connectors features	DIN 43650 - ISO 4400; IP65 (DIN 40050); VDE 0110C	

6 INSTALLATION NOTES

1) The assembling of cartridges inside manifolds must be done tightening the valve exagonal ring (for tightening torque, see section 10). Excessive values can cause anomalous deformation and poppet sticking.

2) The CE certification is valid only with shielded electric cables and connector. Consult also tab. P004.

7 SEALS AND HYDRAULIC FLUID - for other fluids not included in below table, consult Atos Technical Office

Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +80°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C		
Recommended viscosity	15÷100 mm^2/s - max allowed range 2.8 ÷ 500 mm^2/s		
Max fluid contamination level	ISO 4406 class 20/18/15 NAS 1638 class 9, see also filter section www.atos.com or KTF catalog		
Hydraulic fluid	**Suitable seals type**	**Classification**	**Ref. Standard**
Mineral oils	NBR, FKM	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HFDU, HFDR	ISO 12922
Flame resistant with water	NBR	HFC	

8 **DIAGRAMS** based on mineral oil ISO VG 46 at 50°C

9.1 JO-DL-4

Valve pressure drop - NO version
1= A → B de-energized
2= B → A de-energized
3= B → A energized

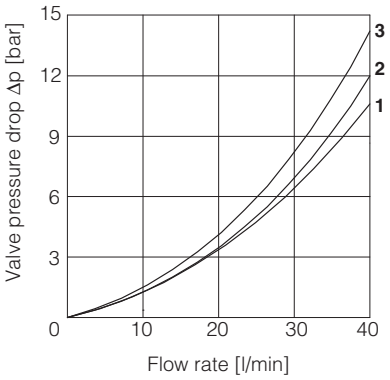

Valve pressure drop - NC version
4= A → B energized
5= B → A de-energized
6= B → A energized

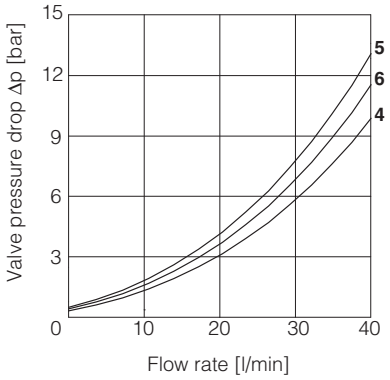

9.2 JO-DL-6

Valve pressure drop - NO version
1= A → B de-energized
2= B → A de-energized
3= B → A energized

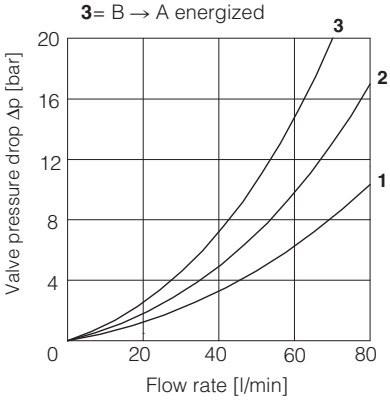

Valve pressure drop - NC version
4= A → B energized
5= B → A de-energized
6= B → A energized

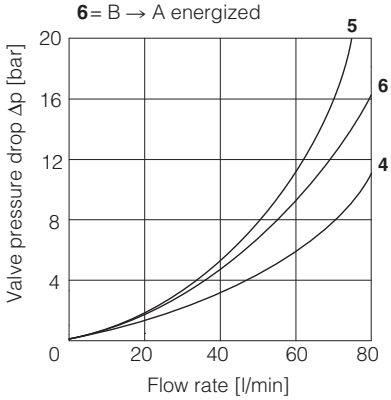

9.3 JO-DL-10

Valve pressure drop - NO version
1= A → B de-energized
2= B → A de-energized
3= B → A energized

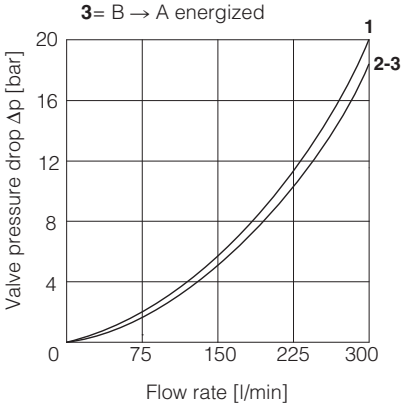

Valve pressure drop - NC version
4= A → B energized
5= B → A de-energized
6= B → A energized

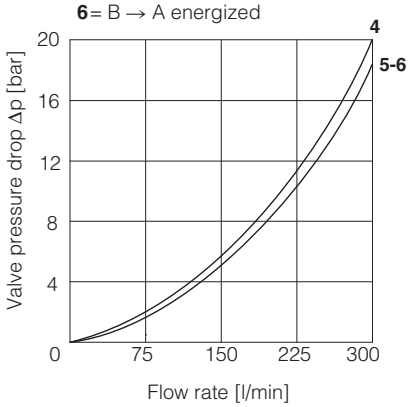

9 INSTALLATION DIMENSIONS [mm]

Version /NO and /NC

JO-DL-4-2/N*
Mass 0.35 Kg

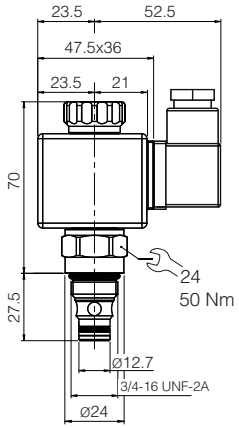

JO-DL-6-2/N*
Mass 0.35 Kg

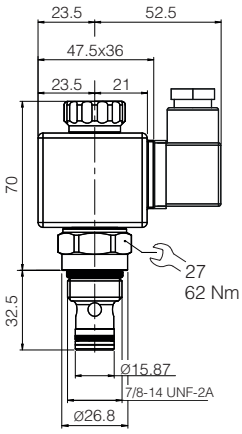

JO-DL-10-2/N*
Mass 0.4 Kg

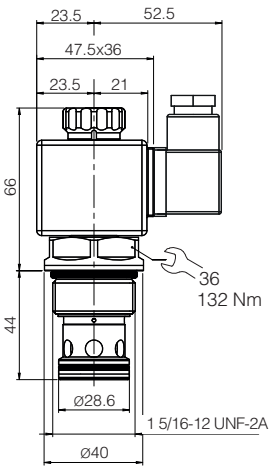

10 CAVITY DIMENSIONS

Note: cavity compatible with old cartridge series

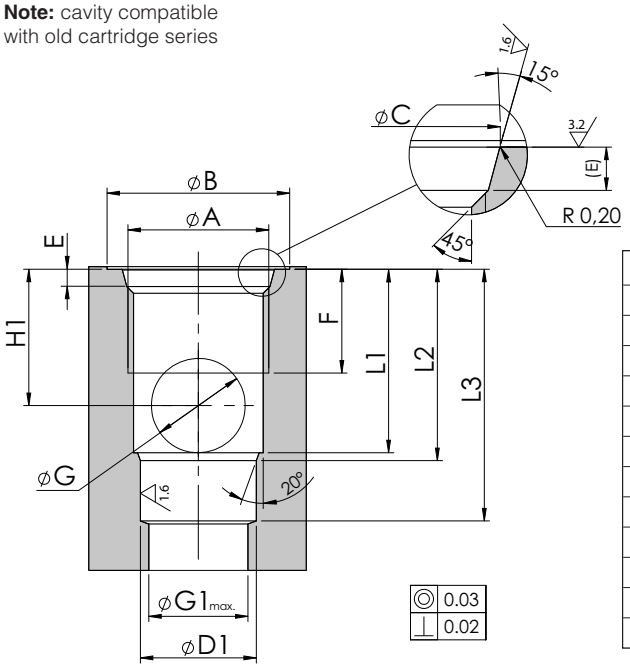

	JO-DL-4-2	JO-DL-6-2	JO-DL-10-2
A	3/4-16 UNF	7/8-14 UNF	1 5/16-12 UNF
B	26	30	42
C	$20.6^{+0.1}_{0}$	$23.9^{+0.1}_{0}$	$35.5^{+0.1}_{0}$
D1	$12.7^{+0.05}_{0}$	$15.87^{+0.05}_{0}$	$28.60^{+0.05}_{0}$
E	$2.6^{+0.3}_{0}$	$2.6^{+0.3}_{0}$	$3.3^{+0.3}_{0}$
F	13	15	20
G	9	12	19
G1	12	15	24
H1	14	18	25
L1	19.1	24.2	33.5
L2	20.5	25.5	36
L3	29	34.5	49